


DIN 975 8.8 THREADED ROD MM:

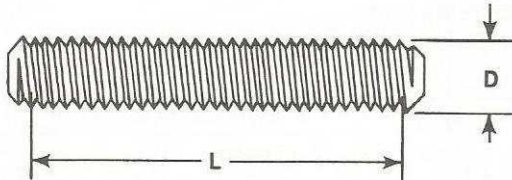

MATERIAL:SAE 1045

MECHANICAL REQUIREMENTS:

Grade	Proof load N/mm^2	Tensile	Yield	Elongation (%)	Reduction (%)	Hardness Rockwell
8.8	600-580	830-800	660-640	12min	52min	$\leq M16$ C32-C22 $> M16$ C34-C23

RANGES:

Diameter	Length
M12-1.75	From 50mm to 2000mm on demand
M14-2	From 50mm to 2000mm on demand
M16-2	From 50mm to 2000mm on demand
M18-2.5	From 50mm to 2000mm on demand
M20-2.5	From 50mm to 2000mm on demand
M22-2.5	From 50mm to 2000mm on demand
M24-3	From 50mm to 2000mm on demand
M27-3	From 50mm to 2000mm on demand
M30-3.5	From 50mm to 2000mm on demand
M33-3.5	From 50mm to 2000mm on demand
M36-4	From 50mm to 2000mm on demand
M39-4	From 50mm to 2000mm on demand
M42-4.5	From 50mm to 2000mm on demand

FINISH AND COATING:black,black oxid,yellow/white zinc,hot dip galvanized.