


ASTM A193 B7 THREADED ROD:

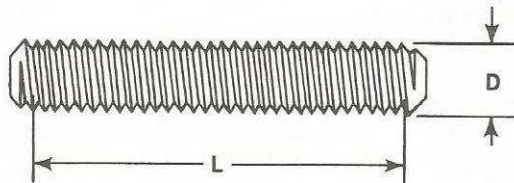

MATERIAL:SAE 4140

MECHANICAL REQUIREMENTS:

Grade	Tensile (KSI)	Yield (KSI)	Elongation (%)	Reduction (%)	Hardness Rockwell
B7	125-100	105-75	18-16	50	C 39-C31

RANGES:

Diameter	Length
1/2"-13	From 50mm to 4000mm on demand
5/8"-11	From 50mm to 4000mm on demand
3/4"-10	From 50mm to 4000mm on demand
7/8"-9	From 50mm to 4000mm on demand
1"-8	From 50mm to 4000mm on demand
1-1/8"-7 AND 1-1/8"-8	From 50mm to 4000mm on demand
1-1/4"-7 AND 1-1/4"-8	From 50mm to 4000mm on demand
1-3/8"-8	From 50mm to 4000mm on demand
1-5/8"-8	From 50mm to 4000mm on demand
1-3/4"-8	From 50mm to 4000mm on demand
1-7/8"-8	From 50mm to 4000mm on demand
2"-8	From 50mm to 4000mm on demand
2-1/4"-8	From 50mm to 4000mm on demand
2-1/2"-8	From 50mm to 4000mm on demand

FINISH AND COATING:black,black oxide,yellow/white zinc,hot dip galvanized.